




Baseline product line

Outlet (basic) [type E]




Wall outlet with grounding

Outlet (basic) [type E] is a regular built-in outlet that cannot be connected or controlled via the Ajax system. It has a design and colors identical to Ajax smart outlets and switches, allowing seamless installation side by side within the same frame.




Outlet components

Outlet (basic) [type E] is a prefab device. All components are purchased separately and installed by attaching them to each other.

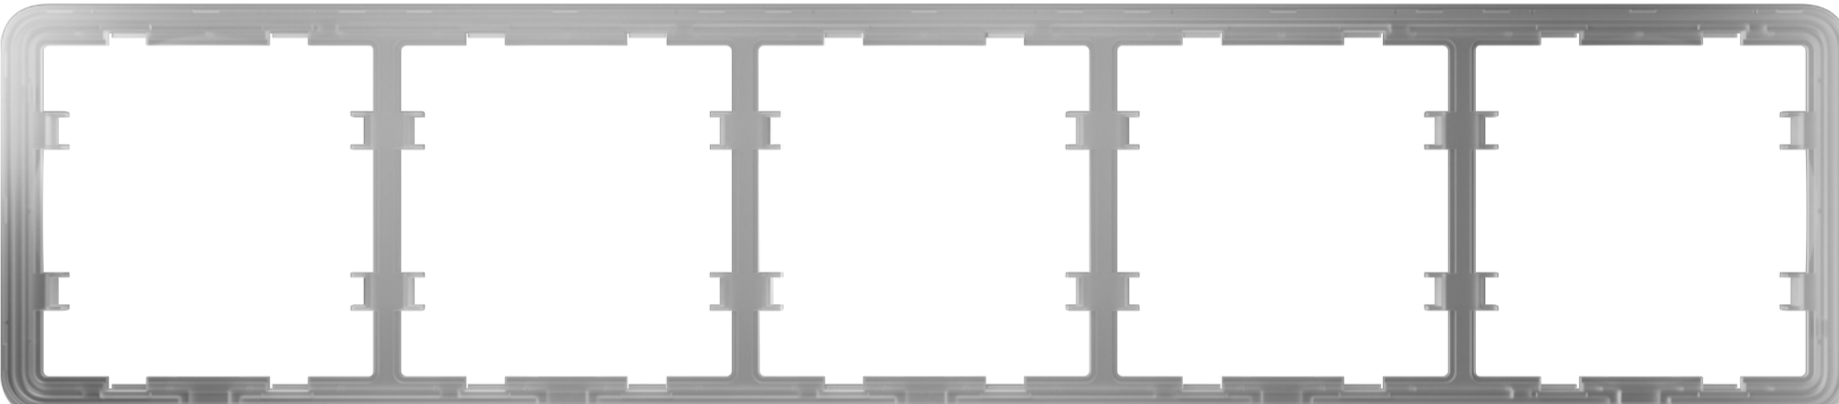
Core	Cover	Frame
Connected to the electrical wiring	Front panel and receptacle cap	A plastic frame for side-by-side installation of 2 to 5 devices horizontally or vertically
		

If the outlet is installed as a standalone device, the front panel and frame come as one component. To install several devices side by side as a set, you need to purchase a frame and suitable covers.





Fits any interior


8 colors are available, suitable for installation everywhere — at home, in the office, a production facility, or any other area.



Configuration variability

Outlet (basic) [type E] can be used either separately or in combination with LightSwitch switches and installed into Frame. All products have the same frame design and color shades, allowing for both vertical and horizontal installation.

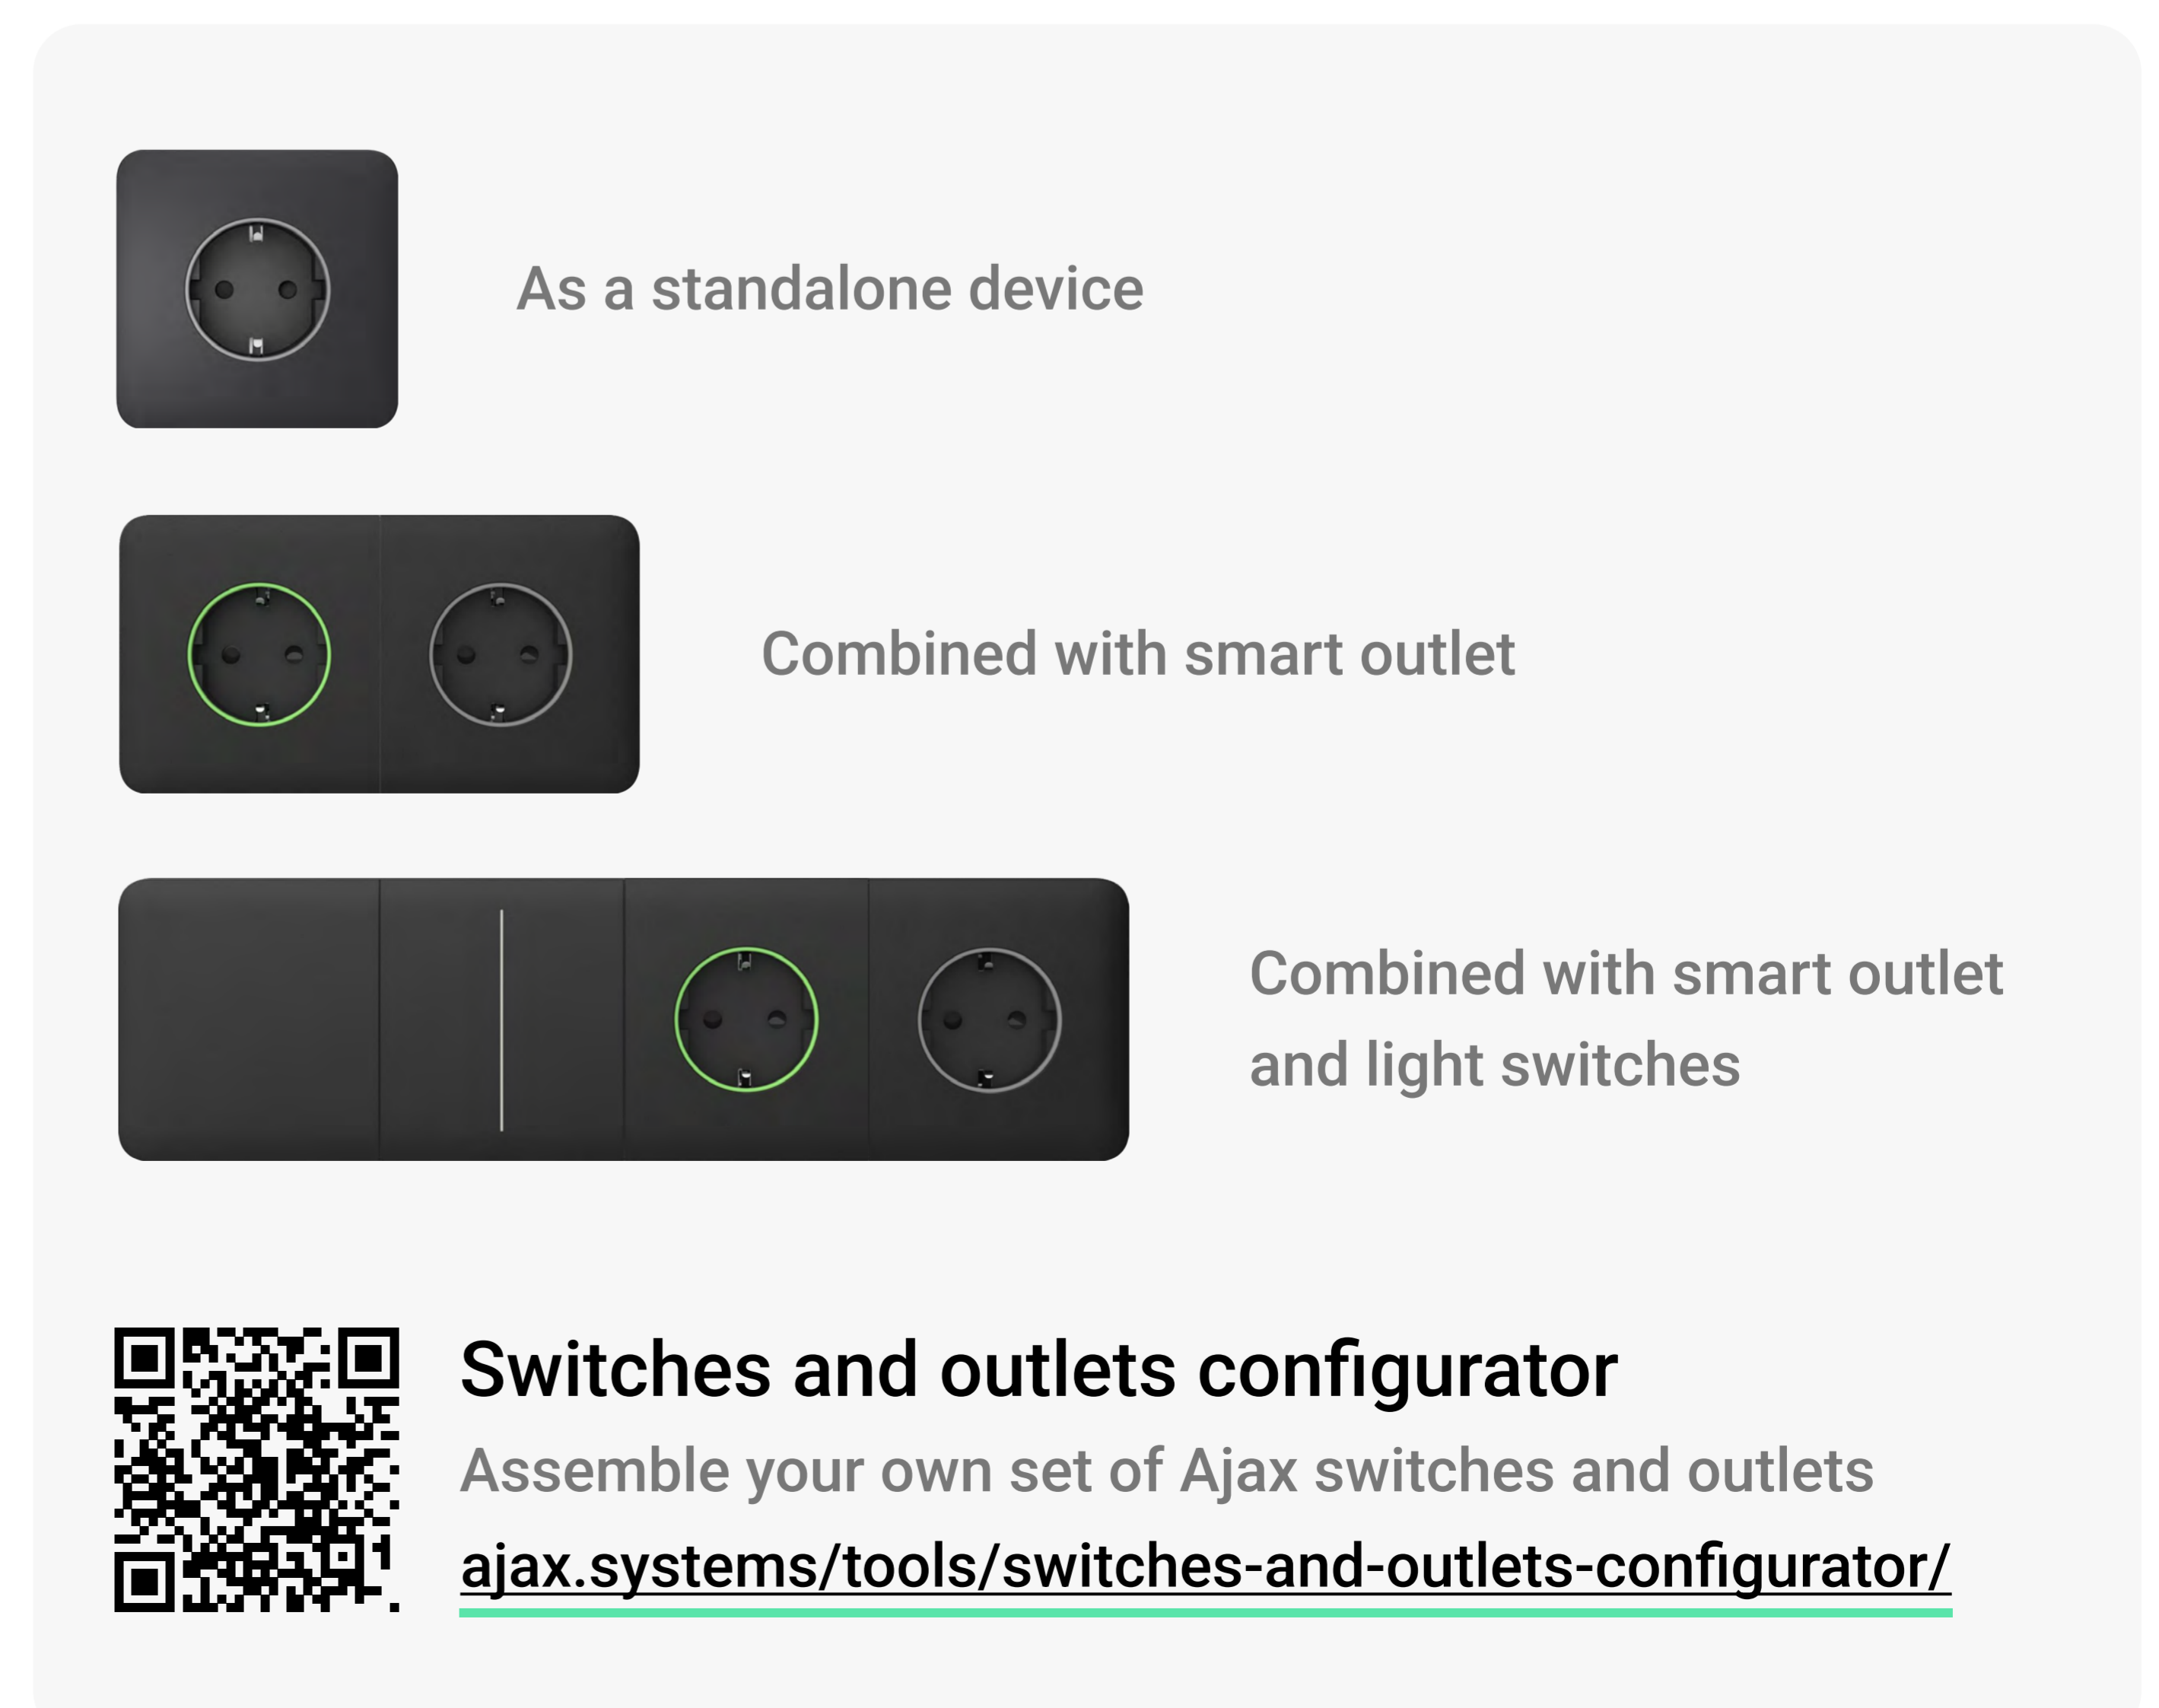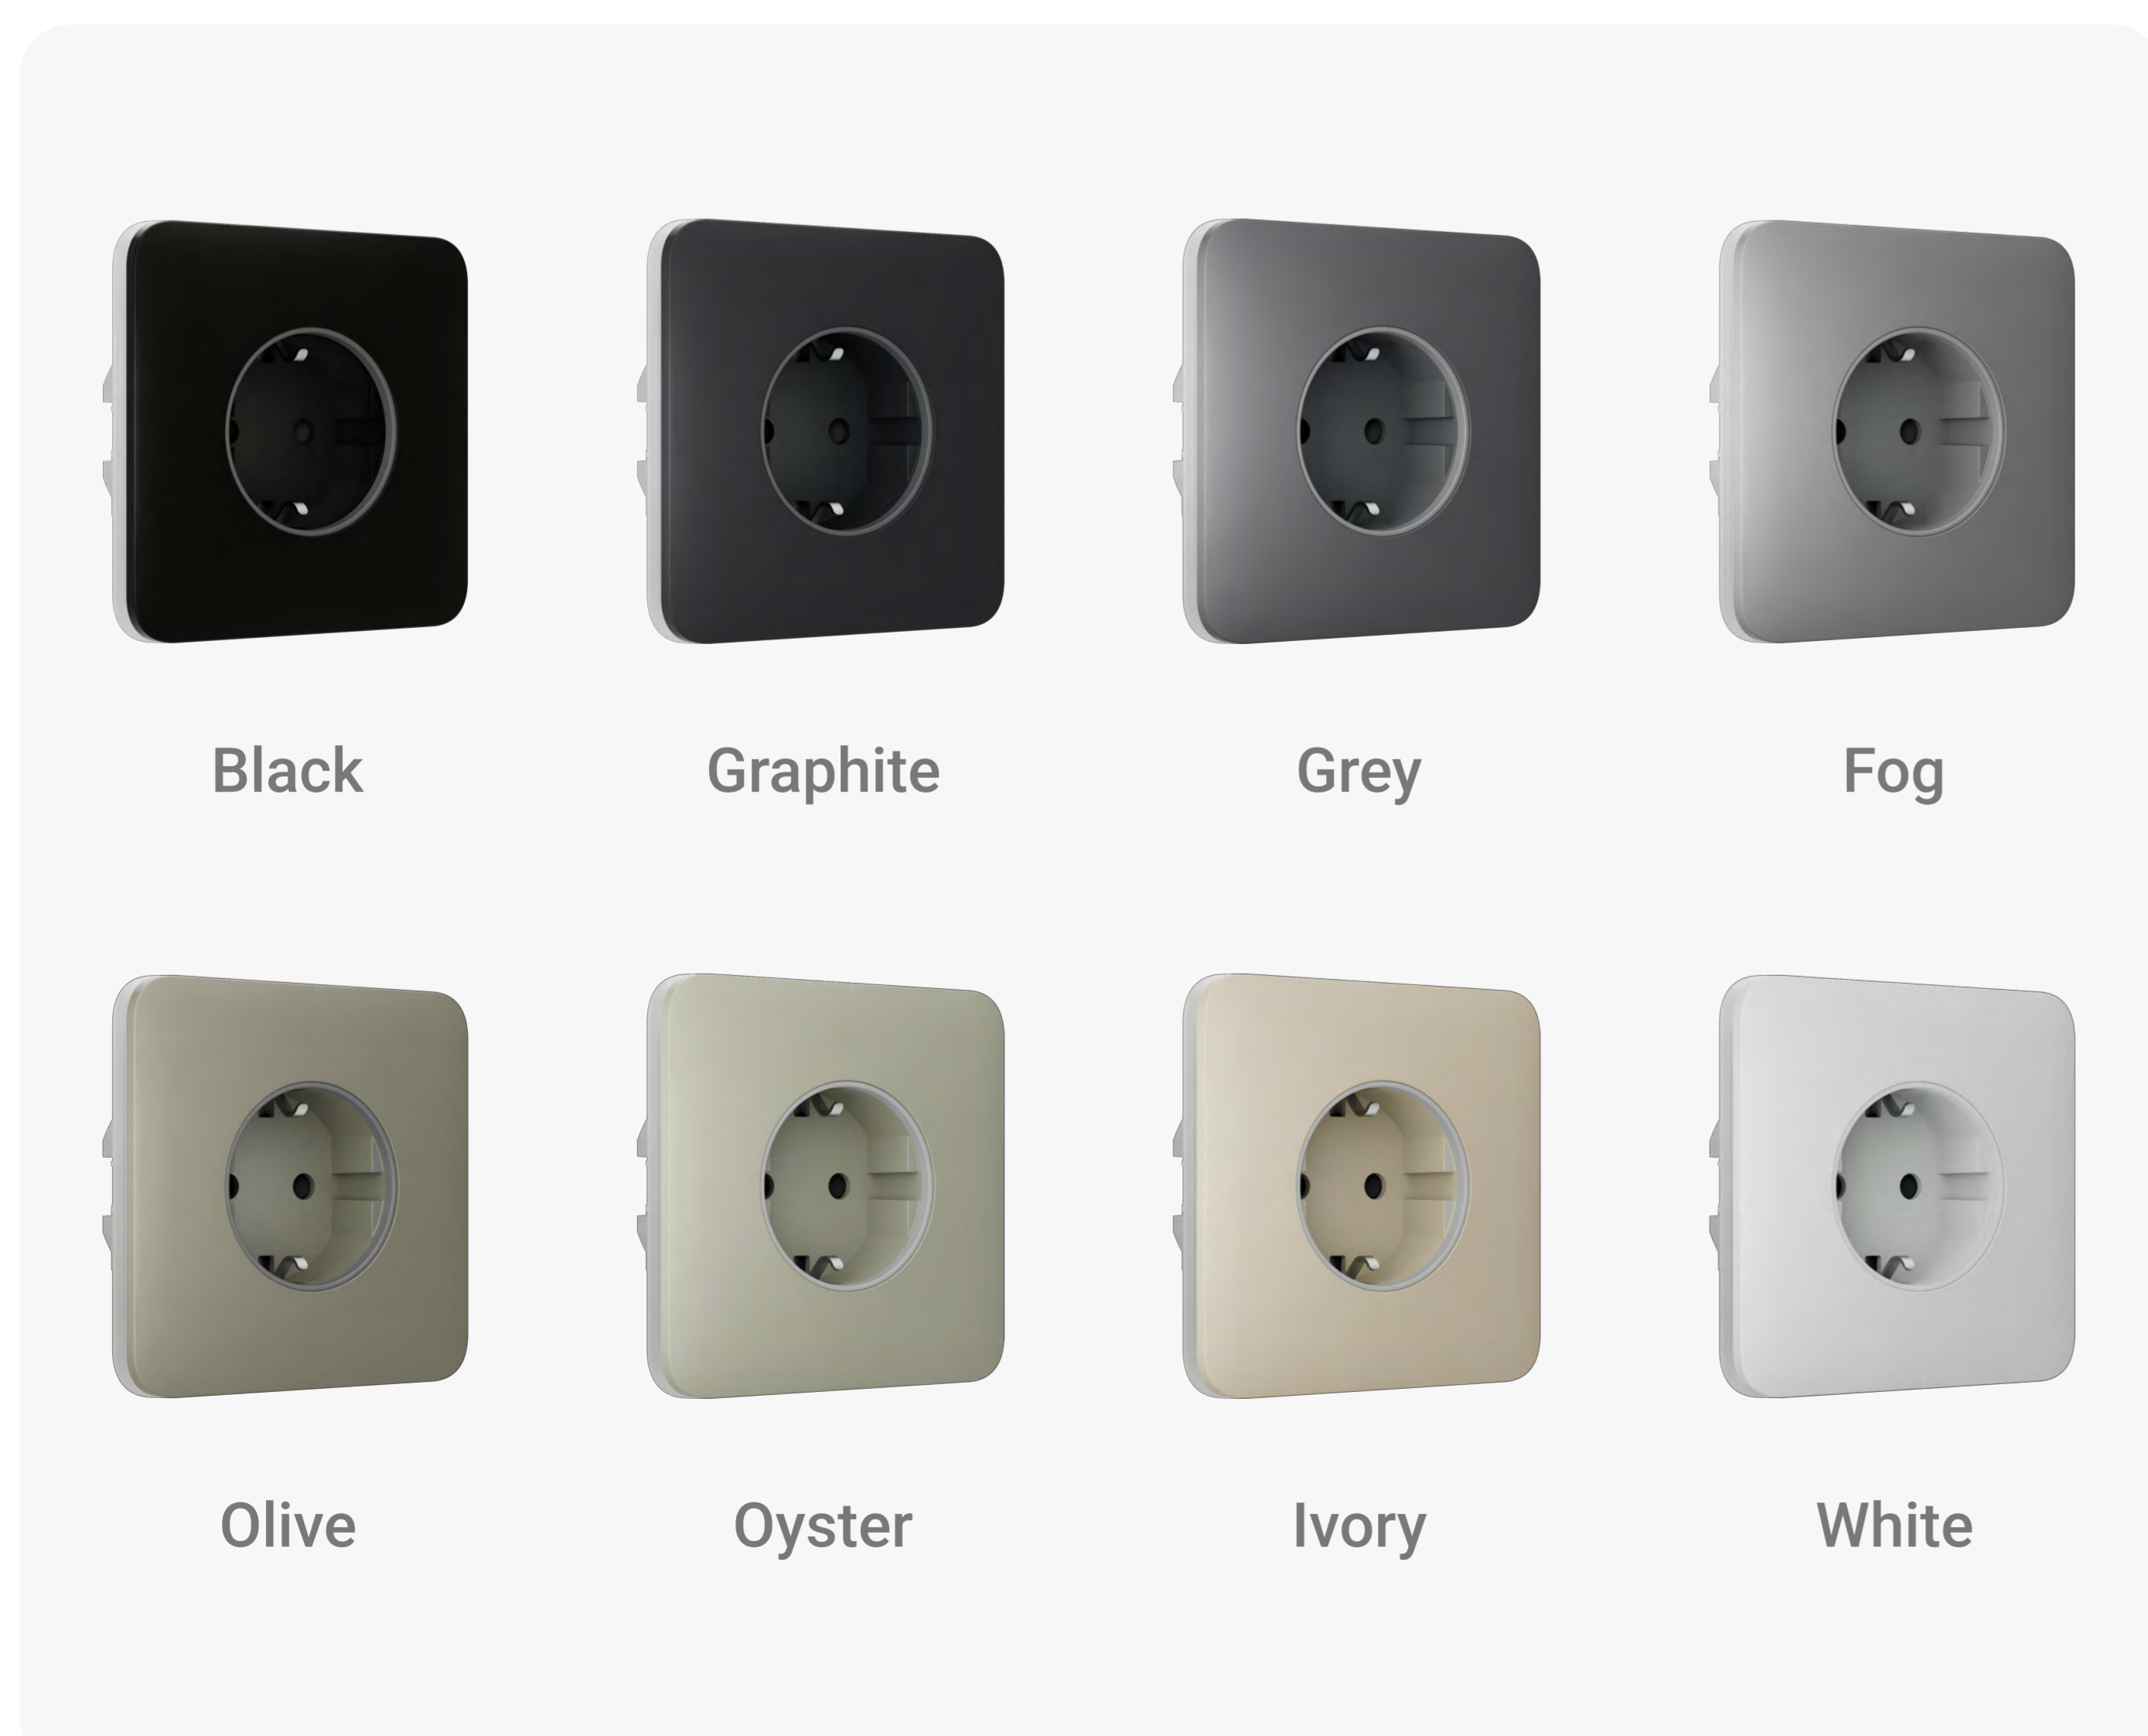



Quick and easy installation

Outlet (basic) [type E] can replace an old outlet without the need to change the standard mounting box and wiring. Front panels are available in various colors and can be quickly replaced if needed.




Superior, Fibra, and Baseline product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

<p>Power supply</p> <p>Power supply voltage 250 V~, 50/60 Hz</p> <p>Maximum power 3,6 kW</p> <p>Maximum load current 16 A</p> <p>Electric shock protection class Class I (with ground terminal)</p>	<p>Installation</p> <p>Operating temperature range from -10 °C to +40 °C</p> <p>Operating humidity up to 75%</p> <p>Protection class IP20</p>	<p>Single outlet components</p> <p>Installed as a standalone device</p> <p>Core OutletCore (basic) [type E]</p> <p>Cover SoloCover (basic) [type E]</p>	<p>Combined outlet components</p> <p>Installed with several devices side by side in one frame</p> <p>Cores OutletCore (basic) [type E] OutletCore (basic) vertical [type E]</p> <p>Covers SideCover (basic) [type E] CenterCover (basic) [type E]</p> <p>Frames Frame (2 seats) Frame (2 seats) vertical Frame (3 seats) Frame (3 seats) vertical Frame (4 seats) Frame (4 seats) vertical Frame (5 seats) Frame (5 seats) vertical</p>
<p>Weight</p> <p>Cores OutletCore (basic) [type E] – 49 g OutletCore (basic) vertical [type E] – 49 g</p> <p>Covers SoloCover (basic) [type E] Front panel: 12 g Receptacle cap: 5 g</p> <p>SideCover (basic) [type E] Front panel: 12 g Receptacle cap: 5 g</p> <p>CenterCover (basic) [type E] Front panel: 11 g Receptacle cap: 5 g</p> <p>Frames Frame (2 seats) – 16 g Frame (2 seats) vertical – 16 g</p> <p>Frame (3 seats) – 22 g Frame (3 seats) vertical – 22 g</p> <p>Frame (4 seats) – 28 g Frame (4 seats) vertical – 28 g</p> <p>Frame (5 seats) – 34 g Frame (5 seats) vertical – 34 g</p>	<p>Dimensions</p> <p>Cores OutletCore (basic) [type E] – 74.2 × 77.3 × 32.8 mm OutletCore (basic) vertical [type E] – 74.2 × 74.5 × 32.8 mm</p> <p>Covers SoloCover (basic) [type E] Front panel: 82.3 × 82.3 × 9.15 mm Receptacle cap: 44 × 19.5 mm</p> <p>SideCover (basic) [type E] Front panel: 82 × 76.2 × 9.15 mm Receptacle cap: 44 × 19.5 mm</p> <p>CenterCover (basic) [type E] Front panel: 82 × 70.5 × 9.15 mm Receptacle cap: 44 × 19.5 mm</p> <p>Frames Frame (2 seats) – 82.8 × 153.5 × 6.3 mm Frame (2 seats) vertical – 153.5 × 82.8 × 6.3 mm</p> <p>Frame (3 seats) – 82.8 × 224.5 × 6.3 mm Frame (3 seats) vertical – 224.5 × 82.8 × 6.3 mm</p> <p>Frame (4 seats) – 82.8 × 295.5 × 6.3 mm Frame (4 seats) vertical – 295.5 × 82.8 × 6.3 mm</p> <p>Frame (5 seats) – 82.8 × 366.5 × 6.3 mm Frame (5 seats) vertical – 366.5 × 82.8 × 6.3 mm</p>		



For detailed information, scan the QR code or follow the link:

ajax.systems/support/devices/outlet-basic-type-e/

-  support@ajax.systems
-  @AjaxSystemsSupport_Bot
-  ajax.systems