


CODE: **AWO356** v1.2/II
 NAME: **LCD/B/F**

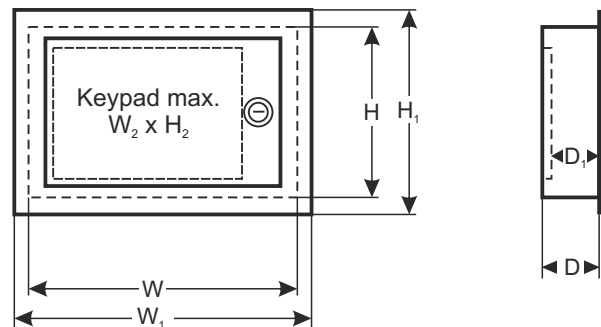

DESTINATION

DSC KEYPADS: RK 5506, RK 5508Z, RK 5516, RK 5532, LCD-600, LCD-4500, LCD-5500, RK 5500Z
FBII KEYPADS: XK 206, STOCK 406, 6805, XL 4600 SM, XL 4612 SM, XK7LC, XK708, OMNIKPLCD
SCANTRONIC KEYPADS: KP600L, EKP1, SIC-1L, KP 2000
ROKONET KEYPADS: RP 296 KLC, RP 296 KCS, RP 296 KL8, RP 296 KL16, PROSYS LCD RP 128 KLC
PARADOX KEYPADS: 626, 629, 633, 639, DIGIPLEX DGP-641 LCD, DGP-610 LED, DGP-620 LED, SPECTRA 1686 V (696),
NAPCO
KEYPADS: RP1054E, RP1016E, RP1000E, GEM-RP2AS, GEM-RP3S, GSM-RP8, GEM-RP1Cae2, GEM-RP2Ase2, GEM3Se2
SATEL
KEYPADS: CA-5 KLCD-L, CA-10 KLCD-L, CA-64 KLCD-L, INTEGRA KLCD (KLCD-R), CA-4V KLED, CA-6 KLED, CA 10 KLED, CA-64 S, CA-64 SZ, SZW-02 CA-5 KLED-S, CA-6 KLED-S, CA 10 KLED-S
CADDX NETWORK KEYPADS: NX-148E(LCD), NX-1348E (LCD-ikona), NX-108E, NX-116E, NX-124E (LED)
GALAXY KEYPADS:MK-5 (CP-25)
VISONIC KEYPADS: KP-1002LCD, 1001/8LED, 1001/16LED
PYRONIX KEYPADS: MATRIX LCD FP 12610
ELKRON KEYPADS: KP100D, KP100, KP200D, KP106
ADEMCO KEYPADS: AD6139
PIMA KEYPADS: RX-400
SUMMIT KEYPADS: LED 3106, LCD 3108, PENTA

TECHNICAL DATA

External dimensions of the enclosure:	W=250, H=162, D=61 [+/- 2mm]
External dimensions of the flange:	W ₁ =276, H ₁ =193 [+/- 2mm]
Keyboard mounting dimensions:	W ₂ =185, H ₂ =142, D ₁ =52 [+/- 2mm]
Weight net/gross:	1,20kg / 1,30kg [+/-0,1kg]
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	lockable (various code, two keys included)
Notes:	removable back mounting plate (without holes) flush type casing with assembly (mask) frame
Declaration, warranty:	RoHS, 2 year from the production date