


CODE: AWO510PU v.1.6/III
NAME: 17/40/M-F/PUSTA

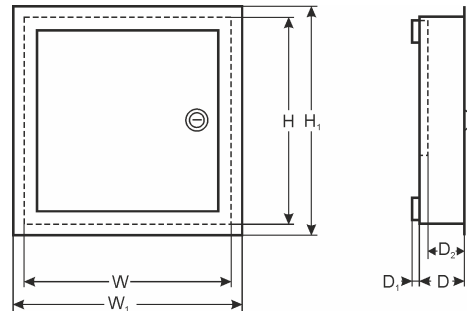

DESTINATION

DSC: 1) PC1616, 1832, 1864, 4020+ 3x 5108 (4108, 5208, 5100, 4116)

MODULES: PC5204, 5400, 5200, 5580, 4216, 4204+ 3x 5108 (4108, 5208, 5100, 4116)

PARADOX: 1) E55, 65, 728ULT, SP4000, 5500, 6000, 7000, EVO48, 192+ZX8 (ZX4, APR3- ADM2, APR3- HUB2, PGM4)

RISCO: 1) PRO24, 116, 128, 140+ RP296EPS

SATEL: 1) CA4V1, 5,6,10, VERSA5, 10, 15, INTEGRA 24, 32+ 2x CA64E (CA10E, SM, MST1)
 2) INTEGRA 64/128 + CA64E(CA10E, SM, MST1)

MODULES: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS- R, OPS- ROC, VGM16, SR, PTSA)+ 2x CA64E (CA10E, MST1, SM)

PYRONIX: 1) Matrix 424, 6, 816, 832, 832+

TEXECOM: 1) Premier 412, 816, 832, 48, 88, 168, 640

TELMOR: 1) TCA-824+ TEX 800

ROGER: 1) PR402, CPR 32-SE

EBS: 1) PX202A

PULSAR: 1) MS1012, MSR1012, MSRK1012
 2) MS2012, MSR2012, MSRK2012

TECHNICAL DATA

External dimensions of the enclosure: W=350, H=400, D+D₁=100+8 [+/- 2mm]

External dimensions of the flange: W₁=385, H₁=430 [+/- 2mm]

Working depth: D₂=80 [+/-2 mm]

Weight net/gross: 4,15kg / 4,55kg [+/-0,1kg]

Battery space: 17Ah/12V Sealed Lead Acid (SLA)

Transformer: without transformer - can be mounted in the casing: TRZ40, TRZ50, TRZ80

Tamper protection: 1 x microswitch: opening, 0,5A@50V/DC max. NC

Material description: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Closing: lockable (MR 008 - different code)

Notes: flush type casing, removable back mounting plate and front frame,
 easy door removal, additional side mounting plate(s), distance from wall - 8mm

Declaration, warranty: CE, 2 year from the production date