

DS-KD8003Y-IME2/NS

Hikvision



- Hikvision
- 2-wire Video intercom with 2 Mpx camera
- No button
- Wide angle lens
- Built-in speaker and microphone
- IR night vision
- TCP/IP connection by DS-KAD70xY
- Remote monitoring via iVMS-4200, Hik-Connect mobile app or indoor monitor software
- Remote door opening
- Surface mount or flush mount with bracket (not included)
- Retro-illuminated name tag
- Suitable for exterior IP65
- Can be integrated with Hikvision modules
- Stainless steel

Features

- Video intercom 2 wire
- 2 Mpx Camera | Without button
- Bidirectional audio
- Mobile App via monitor
- Suitable for exterior IP65
- Modular

Specs

Brand
Model
Operating system

Hikvision
DS-KD8003Y-IME2/NS
Linux

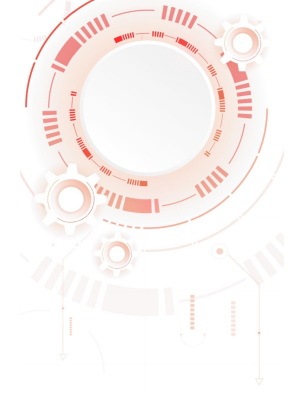


Image sensor
Image Functions
Viewing angle
Audio
Keypad
Outputs

Low Illumination 2 Mpx IR
BLC / WDR / DNR
H: 146°, V: 82°, D: 180°
Bidirectional audio with microphone and speaker
No
2 x lock relay, 1 x module output, 1 x DC 12 V / 500 mA max.

Inputs

4 x auxiliary inputs (output button, feedback, door sensor), 1 x tamper

Remote access

Software iVMS-4200

Network interface

Hik-Connect mobile application

Network connection through 2 threads / SIP protocol 2.0

Modular

Compatible with Hikvision modular boards

Power

DC 24 V with hub 2 wires / 12 V / 1700 mA max.

Degree of protection

Suitable for exterior IP65

Material

Plastic and stainless steel

Temp. operation

-40° C ~ +60° C

Dimensions

98 (H) x 100 (W) x 42 (D) mm

Weight

410 g

Package content

- Hikvision Video Intercom Outdoor Panel
- Mounting material
- User instructions