

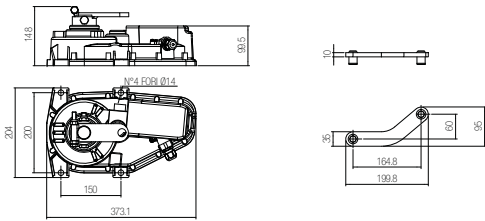


EAGLE

Underground electromechanical actuator for leaf up to 3,5 m (350 kg)per leaf / 600 kg for leaf up to 2 m in length

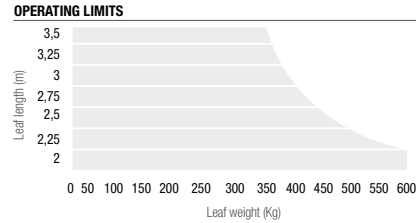

ARTICLE	CODE	DESCRIPTION	PACKAGE	WEIGHT	PALETTE
EAGLE 24V	GEE03500LOG00	24V Underground actuator	1 pcs.	14,5 kg	60
EAGLE 24V EC	GEE0350ELOG00	24V Underground actuator with encoder	1 pcs.	15 kg	60
EAGLE 230V	GEE03500HOG00	230V Underground actuator	1 pcs.	15 kg	60
EAGLE 230V EC	GEE0350EHOG00	230V Underground actuator with encoder	1 pcs.	15 kg	60

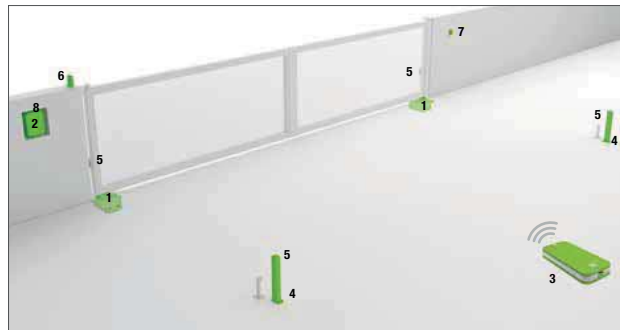

INSTALLATION CHART

- 2 EAGLE 24V** - GEE03500LOG00
24V for swing leaves
- 1 QUAD 24V 2M** - GQUAD2TL0G00
2 Motors control unit 24V Basic
- 1 KEEP 2 RC** - GKEEP2STNOB00
2 Channels rolling code Remote control
- 2 MAST 50** - GMAST00SNOG00
Extruded aluminum column h: 50 cm
- 2 DART** - GDARTSTDN0B00
Photocells
- 1 SWIFT** - GSWIFTSTLYB00
Flashing signal lights
- 1 INDEX** - GINDEXSTNOB00
Key-operated switch 2vec cylinder standard
- 1 AC-50** - GBATTERYLOG00
Battery kit

TECHNICAL CHARACTERISTICS

Electrical information	24V	230V
Operating power supply	24 VDC	230 VAC
Power consumption	150 W	280 W
Current input	6,5 A	1,2 A
Torque	220 Nm	300 Nm
Duty cycle	intensive use	50%
Protection rating (IP)	IP67	IP67
Insulation class	2	1 (mise a la terre)
Working temperature	-20°C / +50°C	-20°C / +50°C
Speed	0,1 Rad/s	0,08 Rad/s
Weight	11,3 Kg	11,6 Kg

EAGLE

ACCESSORIES from page 188 to 189

<p>Outdoor antenna AC 20 / GANTENANOG00</p>	<p>Foundation box cataphoresis, arm kit included EE BOX B / GEE000BANO00</p>	<p>Foundation box s/steel, arm kit included EE BOX INOX / GEE000BANS00</p>	<p>Unlocking system with key for underground gate operator AC 150 / GEE001SENOG00</p>	<p>Unlocking system with key and leverage for underground gate operator AC 160 / GEE002SENOG00</p>
<p>Unlocking system with leverage for underground gate operator AC 170 / GEE003SENOG00</p>	<p>360° opening set AC 180 / GEE360ASNOG00 AC 185 / GEE360ASNOG01 (for motors past 2017)</p>			

CONTROL ACCESSORIES from page 208 to 243

<p>Control unit QUAD 24V-HP / GQUADHP2L0G00 QUAD 230V-HP / GQUADHP2H0G00</p>	<p>Control unit QUAD 24V-1M / GQUADST1L0G00 QUAD 230V-1M / GQUADST1H0G00</p>	<p>Control unit QUAD 24V-2M / GQUADST2L0G00 QUAD 230V-2M / GQUADST2H0G00</p>	<p>Battery kit AC 50 / GBATTERYLOG00</p>	<p>Horizontal 12V electric lock AC 10 / GINDEXGRMOG00</p>	<p>Vertical 12V electric lock AC 20 / GINDEXVRMOG00</p>	<p>Limit switch set for underground gate AC 190 / GEE001RNOG00</p>
--	--	--	--	---	---	--

SAFETY ACCESSORIES from page 244 to 251

<p>Flashing signal lights SWIFT YELLOW / GSWIFTSTLYB00 SWIFT WHITE / GSWIFTSTLWB00</p>	<p>Photocells DART / GDARTSTDN0B00</p>	<p>Photocells slim DART SLIM / GDARTSLIMN0B00</p>	<p>Adjustable photocells DART ADJUSTABLE / GDARTPALN0B00</p>	<p>Signage table AC 40 / GSAFETYNOG00</p>
--	--	---	--	---